EUROCAVE

5 YEAR WARRANTY

ORIGINE FRANCE GARANTIE
BVCert. 6010761

S-INSP-S
Serving cabinet
Built-in and Flush-fitted – Integrated glass door
Multi-temperatures

Wine service area (11 bottles)
ACMSERVW / ACMSERVB

Sliding shelf (6 bottles)
ACMSIW / ACMSIB

Half shelf (5 bottles)
ACMSI-DEMI

CONFIGURATIONS

Premium Pack bottle capacity [1]	Service Pack bottle capacity [1]
29	28
4 sliding shelves (+grid)	2 sliding shelves 1 half shelf 1 Wine service area

GENERAL FEATURES

	Integrated glass
Gross weight packaged (kg)	61,2
Empty net weight (kg) [2]	52,7
Dimensions H x W x D (mm)	810-880 x 594[3] x 590
Dimensions packaged H x W x D (mm)	980 x 645 x 630

TECHNICAL FEATURES

REGULATION

• On/Off/Standby of the display button
• Electronic regulation
• Temperature setting range from 5°C to 20°C (5-10°C for the lower part and 15-20°C for the upper part). Temperature setting 8-18°C
• Electronic external display and settings
• LED screen
• Backlit capacitive keys
• Visual and/or sound alarms in case of:
  - Temperature dysfunction (sound and visual)
  - Sensor fault (sound and visual)
  - Open door (sound and visual)
  - Need to replace charcoal filter (visual)
• Automatic defrost

EQUIPEMENT & ACCESSOIRES

EQUIPMENT

• Reversible integrated glass door with soft close and door stop
• Max thickness of the door panel : 20 mm
• Max weight of the door panel: 12 kg
• Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)
• Charcoal filter
• 4 adjustable feet

ACCESSORIES

• Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier at the front of the shelf
• 6 removable bottles identifiers per sliding shelf
• 1 erasable felt-tip marker
• 1 microfiber cloth
• 1 EuroCave key ring

HOT – COLD – INSULATION TECHNOLOGIES

Cold production:	• Static • Compressor R600a
Cords:	• CE/UK/AU/CH/US
Heat production:	• Heating element
Heat release:	• Automatic, adjustable threshold
Inner material:	• Stucco aluminum
Exterior coating material:	• HDF (High Density Fiber) melamine-faced panels
Insulation type:	• Injected polyurethane foam (59mm)

ENERGY EFFICIENCY & CONSUMPTION

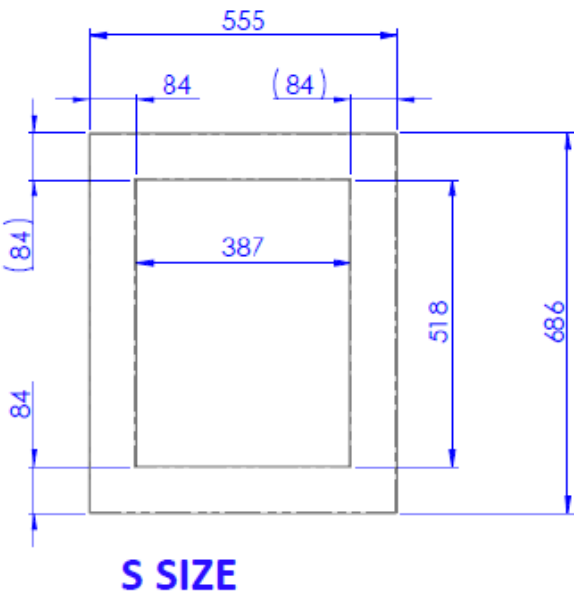| Cords	230V-50Hz (R600a)
Type of door	Integrated glass
Energy efficiency class	A
Annual energy consumption AEc[4] (Kwh/year)	125
Useful volume (liters)	100
Sound emission (dB(A))	38
Ambient temperature range (°C)	12-35

[1] Traditional Bordeaux bottles   [2] Without cladding   [3] Without fillers
[4] Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F)

Dimensions of the decorative panel

555

84 (84)

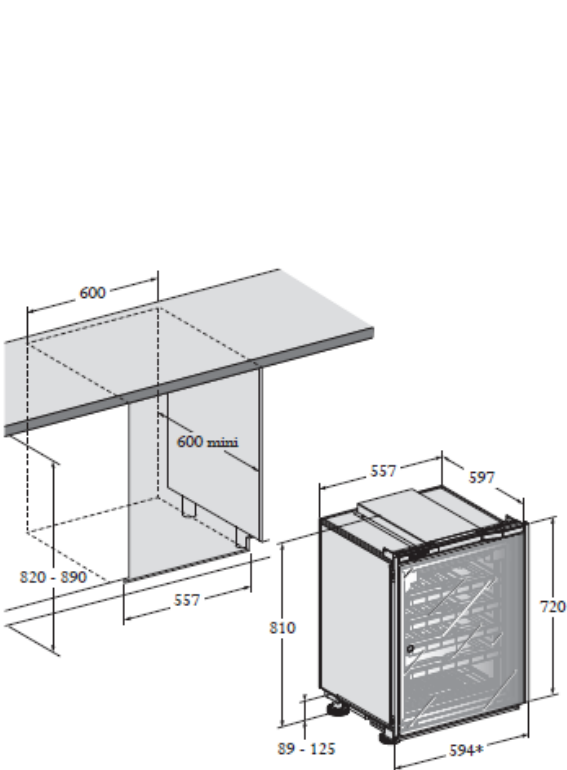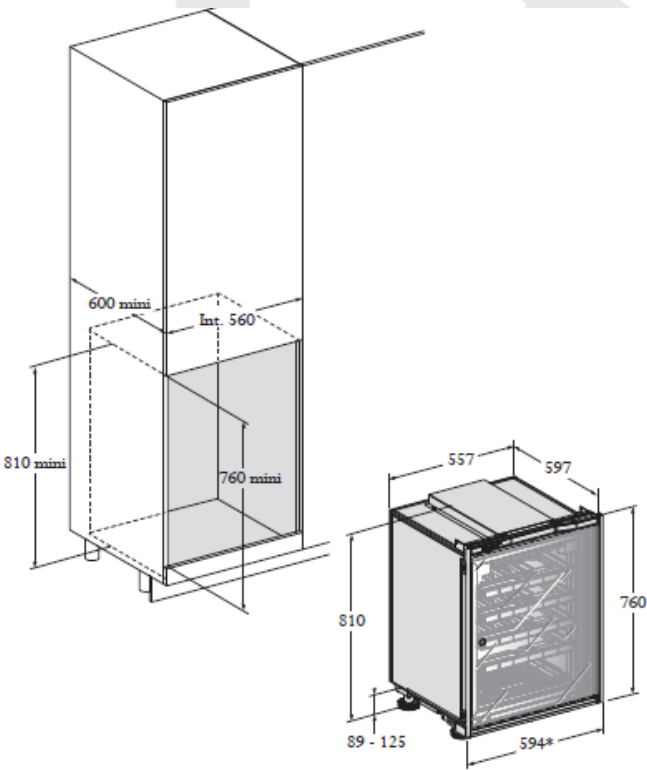(84)

387

518

686

84

84

S SIZE

Storage layouts

Premium
Pack

Service
Pack

Installation diagrams

600

600 mini

820 - 890

557

557

597

810

720

89 - 125

594*

Built-in

600 mini

Int. 560

810 mini

760 mini

557

597

810

760

89 - 125

594*

Flush-fitted